

# ELECTRICITY METER EM340

## DIN 3-PHASE M-BUS



- Digital input (for tariff management)
- Easy connection or wrong current direction detection
- Certified according to MID Directive (option PF only): see "how to order" below
- Other versions available (not certified, option X): see "how to order" on the next page

- Three phase energy meter
- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Accuracy  $\pm 0.5\%$  RDG (current/voltage)
- Direct current measurement up to 65AAC
- Backlit LCD display (3x 8-digit) with integrated touch key-pad
- Energy readout on display: 8 digit
- Variable readout on display: 4 digit
- Energy measurement: kWh and kvarh (imported/exported); kWh+ by 2 tariffs; kWh per phase
- System variables: kW, kvar, kVA, VLL, VLN, PF, Hz, kWdmd, kWdmd peak
- Phase variables: kW, kvar, kVA, VLL, VLN, A, PF
- Self power supply
- Dimensions: 3-DIN module
- Protection degree (front): IP51
- Pulse output (optional, by open collector NPN)
- RS485 Modbus port (optional)
- M-bus port (optional)

### Product description

Three-phase energy meter with backlit LCD display with integrated touch keypad. Particularly indicated for active energy metering and for cost allocation in

applications up to 65 A (direct connection), with dual tariff management availability. It can measure imported and exported energy or be programmed to consider only

the imported one. Housing for DIN-rail mounting, with IP51 front degree protection. The meter is optionally provided with pulse output proportional to the active energy being

measured, RS485 Modbus port or M-bus port. Available for legal metrology (PF option, only for imported energy).

**MID** Certified according to MID Directive, Module B and Module D of Annex II, for legal metrology relevant to active electrical energy meters (see Annex V, MI003, of MID). Can be used for fiscal (legal) metrology.

### How to order EM340 DIN AV2 3 X O1 PF B

Model \_\_\_\_\_  
Range code \_\_\_\_\_  
System \_\_\_\_\_  
Power supply \_\_\_\_\_  
Output \_\_\_\_\_  
Option \_\_\_\_\_  
Measurement \_\_\_\_\_

### Type Selection

| Range code                                                                                 | System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Power supply                                                                                    | Output                                                                           |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <b>AV2:</b> 208 to 400 VLL AC - 5(65)A<br>(Direct connection)                              | <b>3:</b> 3-phase, 3 or 4 wire;<br>2-phase 3 wire                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>X:</b> Self power supply<br>-20% +20% of the<br>rated measuring input<br>voltage, 45 to 65Hz | <b>O1:</b> pulse output<br><b>S1:</b> RS485 Modbus port<br><b>M1:</b> M-bus port |
| Option                                                                                     | Measurement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                 |                                                                                  |
| <b>PF:</b> Certified according to MID Directive. Can be used for fiscal (legal) metrology. | <b>A:</b> The power is always integrated (both in case of positive imported and negative exported power) and the total energy meter is certified according to MID. Operating temperature: from -25 to +55°C/from -13 to +131°F.<br><b>B:</b> Only the total positive energy meter is certified according to MID. Operating temperature: from -25 to +55°C/from -13 to +131°F.<br><b>A70:</b> The power is always integrated (both in case of positive imported and negative exported power) and the total energy meter is certified according to MID. Operating temperature: from -25 to +70°C/from -13 to +158°F.<br><b>B70:</b> Only the total positive energy meter is certified according to MID. Operating |                                                                                                 |                                                                                  |

## STANDARD

Not certified according to MID Directive. Cannot be used for fiscal (legal) metrology.

## How to order **EM340-DIN AV2 3 X O1 X**

Model \_\_\_\_\_  
Range code \_\_\_\_\_  
System \_\_\_\_\_  
Power supply \_\_\_\_\_  
Output \_\_\_\_\_  
Option \_\_\_\_\_

## Type Selection

| Range code                                                       | System                                             | Power supply                                                                                    | Output                                                                           |
|------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <b>AV2:</b> 208 to 400 VLL AC -<br>5(65)A<br>(Direct connection) | <b>3:</b> 3-phase, 3- or 4-wire;<br>2-phase 3-wire | <b>X:</b> self power supply<br>-20% +20% of the<br>rated measuring input<br>voltage, 45 to 65Hz | <b>O1:</b> pulse output<br><b>S1:</b> RS485 Modbus port<br><b>M1:</b> M-bus port |

### Option

**X:** none

## Input specifications

|                                                         |                                                                                                         |                                                                                                                                   |                                                                                                     |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Rated Inputs</b>                                     |                                                                                                         | <b>Energy additional errors</b>                                                                                                   |                                                                                                     |
| Current type                                            | 3-phase loads, direct connection                                                                        | Influence quantities                                                                                                              | According to EN62053-21                                                                             |
| Current range                                           | 5(65)A                                                                                                  | <b>Temperature drift</b>                                                                                                          | ≤200ppm/°C                                                                                          |
| Nominal voltage                                         | 208 to 400 VLL AC                                                                                       | <b>Sampling rate</b>                                                                                                              | 4096 samples/s @ 50Hz<br>4096 samples/s @ 60Hz                                                      |
| <b>Accuracy</b><br>(@25°C ±5°C, R.H. ≤60%, 45 to 65 Hz) |                                                                                                         | <b>Display and touch key-pad</b>                                                                                                  |                                                                                                     |
| Current                                                 | I <sub>min</sub> =0.25A; I <sub>b</sub> : 5A, I <sub>max</sub> : 65A; Un: 113 to 265VLN (196 to 460VLL) | Type                                                                                                                              | Backlit LCD, 3 rows by 8-digit each, h 7 mm                                                         |
|                                                         | I <sub>min</sub> =0.25A; I <sub>b</sub> : 5A, I <sub>max</sub> : 65A; from 208 to 400 VLL AC            | Read-out                                                                                                                          | Energy: 8 digit. Variables: 4 digit                                                                 |
|                                                         | From 0.04I <sub>b</sub> to 0.2I <sub>b</sub> : ±(0.5%RDG+1DGT)                                          | Touch key                                                                                                                         | 3 (DOWN, Enter and UP).                                                                             |
|                                                         | From 0.2I <sub>b</sub> to I <sub>max</sub> : ±(0.5%RDG)                                                 | <b>Max. and Min. indication</b>                                                                                                   |                                                                                                     |
|                                                         | In the range Un: ±(0.5% RDG)                                                                            | Energies                                                                                                                          | Max. 99 999 999<br>Min. 0.01                                                                        |
| Phase-neutral voltage                                   | In the range Un: ±(1% RDG)                                                                              | Variables                                                                                                                         | Max. 9999<br>Min. 0.01                                                                              |
| Phase-phase voltage                                     | Range: 45 to 65Hz.                                                                                      | <b>Memory</b>                                                                                                                     |                                                                                                     |
| Frequency                                               | From 0.05 I <sub>n</sub> to I <sub>max</sub> , within Un range, PF=1: ±(1% RDG)                         | Energy                                                                                                                            | 10 <sup>12</sup> cycles. Energy value is saved every time the less significant digit increases.     |
| Active power                                            | From 0.1 I <sub>n</sub> to I <sub>max</sub> , within Un range, PF=0.5L or 0.8C: ±(1% RDG)               | Programming parameters                                                                                                            | 10 <sup>12</sup> cycles. When a parameter is modified, only the relevant memory cell is overwritten |
| Power factor                                            | ±[0.001+1%(1.000 - "PF RDG")]                                                                           | <b>LEDs</b>                                                                                                                       |                                                                                                     |
| Reactive power                                          | From 0.05 I <sub>n</sub> to I <sub>max</sub> , within Un range, sinφ=1: ±(2% RDG)                       | Flashing red light pulses according to EN50470-3, EN62052-11, 1000 imp./ kWh (min. period: 90ms)                                  |                                                                                                     |
| Energies                                                | From 0.1 I <sub>n</sub> to I <sub>max</sub> , within Un range, sinφ=0.5L or 0.8C: ±(2% RDG)             | Fix orange light: wrong current direction (only with PFB option or with "B" measurement selection in case of X option)            |                                                                                                     |
|                                                         | Active energy                                                                                           | <b>Current overloads</b>                                                                                                          |                                                                                                     |
|                                                         | Reactive energy                                                                                         | Continuous<br>For 10ms<br>Short circuit withstand                                                                                 |                                                                                                     |
| Start-up current:                                       | 20mA                                                                                                    | 65A, @ 50Hz<br>1950 A<br>4.5kA 10 ms according to IEC62052-31:2015                                                                |                                                                                                     |
| Start-up voltage                                        | Self-consumption is not measured.<br>90VLN                                                              | <b>Voltage Overloads</b>                                                                                                          |                                                                                                     |
| <b>Resolution</b>                                       | Display                                                                                                 | Continuous<br>For 500ms                                                                                                           |                                                                                                     |
|                                                         | Current                                                                                                 | 1.2 Un<br>2 Un                                                                                                                    |                                                                                                     |
|                                                         | Voltage                                                                                                 | <b>Input impedance</b>                                                                                                            |                                                                                                     |
|                                                         | Power                                                                                                   | 230VL-N<br>120VL-N<br>5(65) A                                                                                                     |                                                                                                     |
|                                                         | Frequency                                                                                               | 1.2Mohm<br>1.2Mohm<br>< 1.5 VA per channel                                                                                        |                                                                                                     |
|                                                         | PF                                                                                                      | <b>Wrong connection detection</b>                                                                                                 |                                                                                                     |
|                                                         | Energies (positive)                                                                                     | Installation guide to indicate if connections are correctly carried out. Can be disabled.                                         |                                                                                                     |
|                                                         | Energies (negative)                                                                                     | Phase sequence                                                                                                                    |                                                                                                     |
|                                                         | Serial communication                                                                                    | Indicates if the phase sequence is not the correct one (L1-L2-L3)                                                                 |                                                                                                     |
|                                                         | Current                                                                                                 | Correct current direction                                                                                                         |                                                                                                     |
|                                                         | Voltage                                                                                                 | Indicates if the current direction is not the right one (only with PFB option or with type "B" measurement selection in case of X |                                                                                                     |
|                                                         | Power                                                                                                   |                                                                                                                                   |                                                                                                     |
|                                                         | Frequency                                                                                               |                                                                                                                                   |                                                                                                     |
|                                                         | PF                                                                                                      |                                                                                                                                   |                                                                                                     |
|                                                         | Energies (positive)                                                                                     |                                                                                                                                   |                                                                                                     |
|                                                         | Energies (negative)                                                                                     |                                                                                                                                   |                                                                                                     |

## Input specifications (cont.)

|                 |                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                   |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Load conditions | option).<br>The wrong connection detection works in case of loads with:<br>- PF>0.766 (<40°) power factor if inductive or PF>0.996 (<5°) if capacitive<br>- a current at least equal to 10% rated current (primary current transformer) | are summed to increase the total positive energy totalizer (kWh+), while the others increase the total negative totalizer (kWh-).<br>Ex.<br>P L1= +2kW, P L2 . +2kW, P L3 = -3 kW<br>Integration time = 1 hour<br>+kWh = (2+2) x1h = 4 kWh<br>-kWh = 3 x 1h= 3kWh |
| Energy metering | in every measuring interval the single phase energies with positive sign                                                                                                                                                                |                                                                                                                                                                                                                                                                   |

## Digital input specifications

|                             |                                                 |          |                                                                                                           |
|-----------------------------|-------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------|
| <b>Digital inputs</b>       | Free of voltage contact                         | Overload | In case a voltage is erroneously applied to the digital input, the input is not damaged up to 30 VAC/ DC. |
| Function                    | Tariff management (switch between t1-t2)        |          |                                                                                                           |
| Number of inputs            | 1                                               |          |                                                                                                           |
| Contact measurement voltage | 5 V                                             |          |                                                                                                           |
| Input impedance             | 1kohm                                           |          |                                                                                                           |
| Contact resistance          | ≤1kohm, close contact<br>≥100kohm, open contact |          |                                                                                                           |

## Output specifications

|                          |                                                                                                                                                                                  |                             |                                                                                                                                                                                               |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RS485 serial port</b> | RS485 by screw connection.                                                                                                                                                       | Protocol                    | M-bus according to EN13757-1                                                                                                                                                                  |
| Function                 | For communication of measured data, programming parameters                                                                                                                       | Baud rate                   | 0.3, 2.4, 9.6 kbaud                                                                                                                                                                           |
| Protocol                 | ModBus RTU (slave function)                                                                                                                                                      | Meters in the M-bus network | 250                                                                                                                                                                                           |
| Baud rate                | 9.6, 19.2, 38.4, 57.6, 115.2 kbaud,                                                                                                                                              | Primary address             | Selectable                                                                                                                                                                                    |
| Data format              | even or no parity,                                                                                                                                                               | Secondary address           | Univocally defined in each unit                                                                                                                                                               |
| Address                  | 1 to 247 (default: 01)                                                                                                                                                           | Identification number range | from 9000 0000 to 9999 9999                                                                                                                                                                   |
| Driver input capability  | 1/8 unit load. Maximum 247 devices on the same bus.                                                                                                                              | Other                       | Available functions: wild card, header, initialisation SND_NKE, and req_udr management. Management of primary address modification via M-bus and reset of partial energy via M-bus available. |
| Data refresh time        | 1sec                                                                                                                                                                             |                             | VIF, VIFE, DIF and DIFE: see protocol                                                                                                                                                         |
| Read command             | 50 words available in 1 read command                                                                                                                                             |                             |                                                                                                                                                                                               |
| Rx/Tx indication         | Rx segment on display is shown when a valid Modbus command is sent to that specific meter<br>Tx segment on display is shown when a valid Modbus reply is sent back to the master | <b>Static output</b>        |                                                                                                                                                                                               |
| <b>M-bus port</b>        | M-bus by screw connection.                                                                                                                                                       | Purpose                     | For pulse output proportional to the active energy (kWh)                                                                                                                                      |
| Function                 | For communication of measured data                                                                                                                                               | Pulse rate                  | Selectable in multiple of 100<br>Max 500 or 1500 kWh according to pulse ON duration                                                                                                           |

## Output specifications (cont.)

|                   |                                                    |      |                           |
|-------------------|----------------------------------------------------|------|---------------------------|
| Pulse ON duration | Selectable: 30ms or 100 ms according to EN62052-31 | Load | $V_{ON}$ 1 VDC max. 100mA |
| Output type       | Open collector NPN                                 |      | $V_{OFF}$ 80 VDC max.     |

## General specifications

|                                                     |                                                                                          |                            |                                                                                                                       |
|-----------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Operating temperature</b>                        |                                                                                          | <b>Standard compliance</b> |                                                                                                                       |
| PF option (standard or with suffixes from 01 to 60) | From -25 to +55°C/from -13 to +131°F                                                     | Safety                     | EN62052-11                                                                                                            |
| PF option (with suffixes from 61 to 99)             | From -25 to +70°C/from -13 to +158°F                                                     | Metrology                  | EN62053-21, EN50470-3                                                                                                 |
| X option                                            | From -25 to +65°C/from -13 to +149°F indoor, (R.H. from 0 to 90% non-condensing @ 40°C)  | <b>Approvals</b>           | CE, MID (PF option only)                                                                                              |
| <b>Storage temperature</b>                          | From -30 to +80°C/from -22 to +176°F (R.H. < 90% non-condensing @ 40°C)                  | <b>Connections</b>         |                                                                                                                       |
| <b>Overvoltage category</b>                         | Cat. III                                                                                 | Cable cross-section area   | Measuring inputs: max. 16 mm², min. 2.5 mm² with/without metallic cable ferrule; Max. screw tightening torque: 2.8 Nm |
| <b>Utilisation category</b>                         | UC2                                                                                      | Other terminals            | 1.5 mm², Min./Max. screws tightening torque: 0.4 Nm                                                                   |
| <b>Insulation (for 1 minute)</b>                    | 4000 VAC RMS between measuring inputs and digital/serial output (see table) 4000 VAC RMS | <b>Housing</b>             |                                                                                                                       |
| <b>Dielectric strength</b>                          | 4000 VAC RMS for 1 minute                                                                | Dimensions (WxHxD)         | 54 x 90 x 63 mm                                                                                                       |
| <b>EMC</b>                                          |                                                                                          | Material                   | Noryl, self-extinguishing: UL 94 V-0                                                                                  |
| Electrostatic discharges                            | According to EN62052-11 15kV air discharge;                                              | Sealing covers             | Included                                                                                                              |
| Immunity to irradiated electromagnetic fields       | Test with current: 10V/m from 80 to 2000MHz;                                             | <b>Mounting</b>            | DIN-rail                                                                                                              |
| Electromagnetic fields                              | Test without any current: 30V/m from 80 to 2000MHz;                                      | <b>Protection degree</b>   |                                                                                                                       |
| Burst                                               | On current and voltage measuring inputs circuit: 4kV                                     | Front                      | IP51                                                                                                                  |
| Immunity to conducted disturbances                  | 10V/m from 150KHz to 80MHz                                                               | Screw terminals            | IP20                                                                                                                  |
| Surge                                               | On current and voltage measuring inputs circuit: 4kV;                                    | <b>Weight</b>              | Approx. 240 g (packing included)                                                                                      |
| Radio frequency                                     | According to CISPR 22                                                                    |                            |                                                                                                                       |

# Power supply specifications


|                   |                                         |                   |              |
|-------------------|-----------------------------------------|-------------------|--------------|
| Self power supply | 208 to 400VAC VLL, -20%<br>+20% 50/60Hz | Power consumption | ≤ 1W, ≤ 10VA |
|-------------------|-----------------------------------------|-------------------|--------------|

## Insulation (for 1 minute) between inputs and outputs


|                          | Measuring input | Digital or serial output | Digital input |
|--------------------------|-----------------|--------------------------|---------------|
| Measuring input          | -               | 4 kV                     | 4 kV          |
| Digital or serial output | 4 kV            | -                        | 0 kV          |
| Digital input            | 4 kV            | 0 kV                     | -             |

## Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

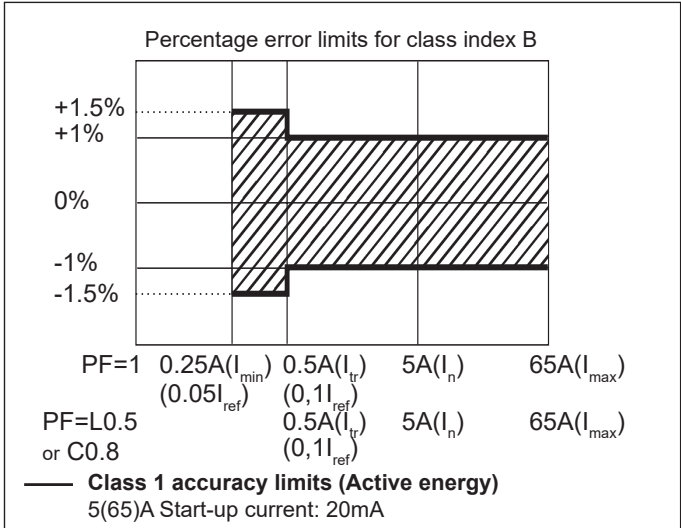

kvarh, accuracy (RDG) depending on the current

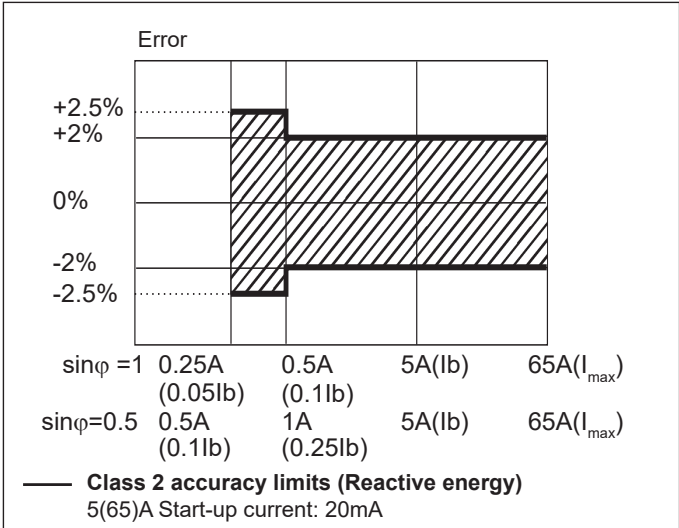

## Display pages

| No | 1 <sup>st</sup> row | 2 <sup>nd</sup> row | 3 <sup>rd</sup> row | “Full” mode | “Easy” mode | Note                                                                                                                                                                                                                                           |
|----|---------------------|---------------------|---------------------|-------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0  | kWh+ (imported)     |                     | kW system           | X           | X           | In PF version (MID) this is the only certified energy meter. In PFA version and in X version with Measurement menu set to “A”, this is considering the total energy without considering the current direction.                                 |
| 1  | kWh- (exported)     |                     | kW system           | X           | X           | Only in X version, with Measurement menu set to “B”                                                                                                                                                                                            |
| 2  | kWh+ (imported)     |                     | V L-L system        | X           | X           |                                                                                                                                                                                                                                                |
| 3  | kWh+ (imported)     |                     | V L-N system        | X           | X           |                                                                                                                                                                                                                                                |
| 4  | kWh+ (imported)     |                     | PF system           | X           |             |                                                                                                                                                                                                                                                |
| 5  | kWh+ (imported)     |                     | Hz                  | X           |             |                                                                                                                                                                                                                                                |
| 6  | kvarh+ (imported)   |                     | kvar system         | X           | X           | In X version with Measurement menu set to “A”, this is considering the total positive reactive energy without considering the current direction.                                                                                               |
| 7  | kvarh- (exported)   |                     | kvar system         | X           | X           | Only in X version, with Measurement menu set to “B”                                                                                                                                                                                            |
| 8  | kWh+ (imported)     |                     | kVA system          | X           |             |                                                                                                                                                                                                                                                |
| 9  | kWh+ (imported)     | kWdmd peak          | kWdmd               | X           |             |                                                                                                                                                                                                                                                |
| 10 | kWh (t1)            | “t1”                | kW system           | X           | X           | Only relevant to kWh+, with Tariff menu set to ON.                                                                                                                                                                                             |
| 11 | kWh (t2)            | “t2”                | kW system           | X           | X           | Only relevant to kWh+, with Tariff menu set to ON.                                                                                                                                                                                             |
| 12 | kWh L1              | kWh L2              | kWh L3              | X           |             | In X version with Measurement menu set to “A”, this is considering the total energy without considering the current direction. In PFB version and in X version with Measurement menu set to “B”, this is considering only the imported energy. |
| 13 | kVA L1              | kVA L2              | kVA L3              | X           |             |                                                                                                                                                                                                                                                |
| 14 | kvar L1             | kvar L2             | kvar L3             | X           |             |                                                                                                                                                                                                                                                |
| 15 | PF L1               | PF L2               | PF L3               | X           |             |                                                                                                                                                                                                                                                |
| 16 | V L-N L1            | V L-N L2            | V L-N L3            | X           |             |                                                                                                                                                                                                                                                |
| 17 | V L-L L1            | V L-L L2            | V L-L L3            | X           |             |                                                                                                                                                                                                                                                |
| 18 | A L1                | A L2                | A L3                | X           | X           |                                                                                                                                                                                                                                                |
| 19 | kW L1               | kW L2               | kW L3               | X           |             |                                                                                                                                                                                                                                                |

X= available


## Additional available information on the display

| Type   | Description       | Note                                                                                                |
|--------|-------------------|-----------------------------------------------------------------------------------------------------|
| Info 1 | Year (2016)       | Year of production                                                                                  |
| Info 2 | Serial (dddnnnA)  | Serial number (ddd= day of the year; nnn=progressive number; A= production line, internal use only) |
| Info 3 | Rev (A.01)        | Firmware revision                                                                                   |
| Info 4 | Puls led          | Led pulsed/kWh                                                                                      |
| P3     | System            | System type                                                                                         |
| P6     | Measure           | Measurement type                                                                                    |
| P7     | Install           | Wrong connection detection                                                                          |
| P8     | P int             | Integration time for Wdmd calculation                                                               |
| P9     | Mode              | Set of variables on display                                                                         |
| P10    | Tariff            | Tariff enabling                                                                                     |
| P11    | Home              | Selected home page                                                                                  |
| P12-1  | Pulse duration    | Pulse ON duration                                                                                   |
| P12-2  | Pulse rate        | Pulse rate                                                                                          |
| P13    | Primary address   | M-bus primary address                                                                               |
| P14    | Address           | Modbus serial address                                                                               |
| P15    | Kbaud             | M-bus or Modbus baud rate                                                                           |
| P16    | Parity            | Modbus parity                                                                                       |
| Info 5 | Secondary address | M-bus secondary address                                                                             |

## Wiring diagrams


Two-phase system, 3-wire (F 315mA)

**Fig.1**




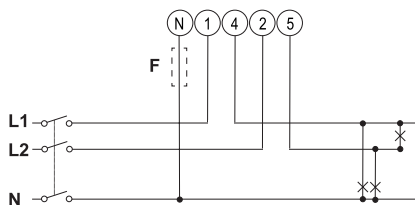


Three-phase system, 3-wire.



**Fig.2**

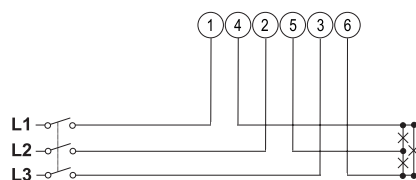


# Wiring diagrams (cont.)

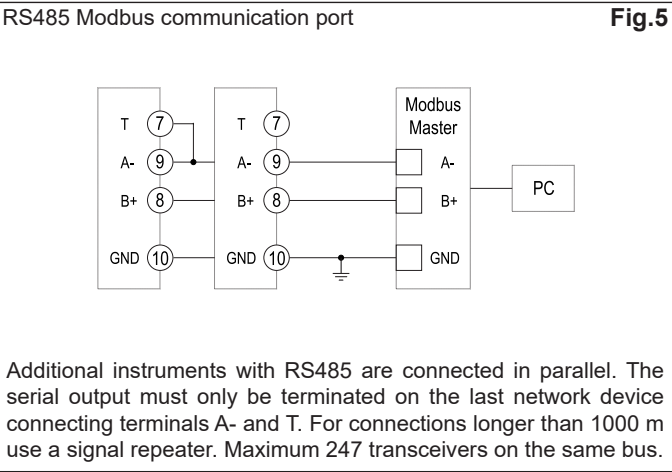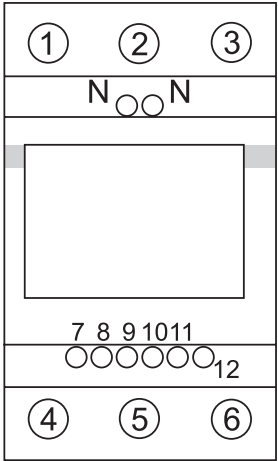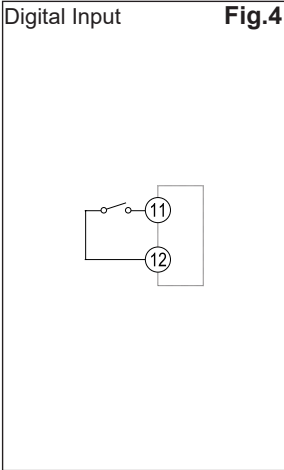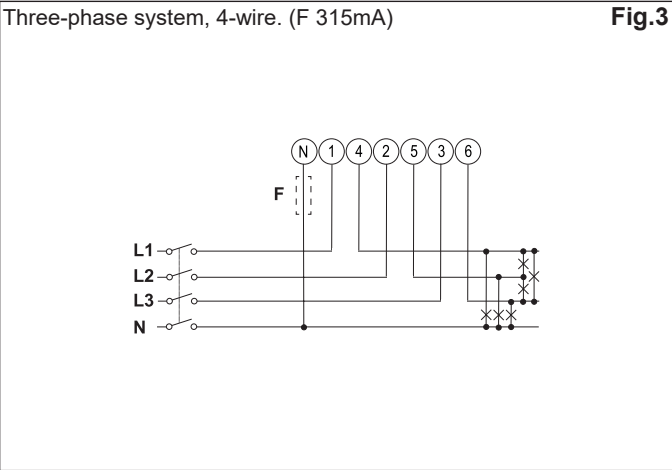

Additional instruments with RS485 are connected in parallel. The serial output must only be terminated on the last network device connecting terminals A- and T. For connections longer than 1000 m use a signal repeater. Maximum 247 transceivers on the same bus.

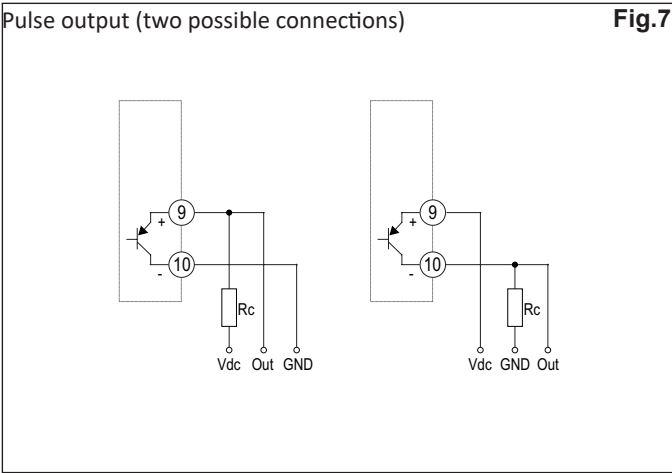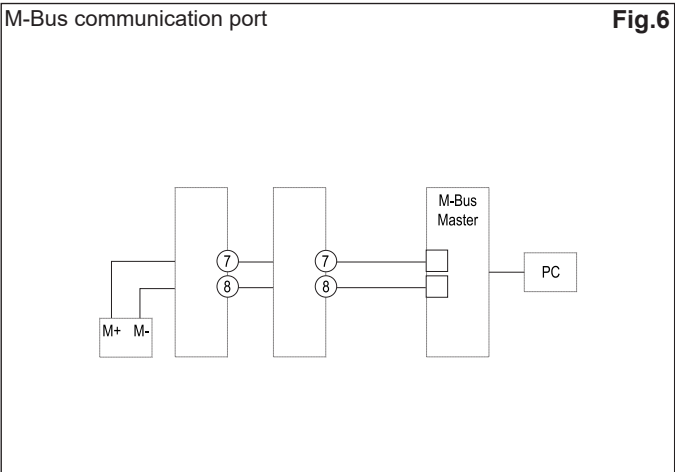

# Front panel description

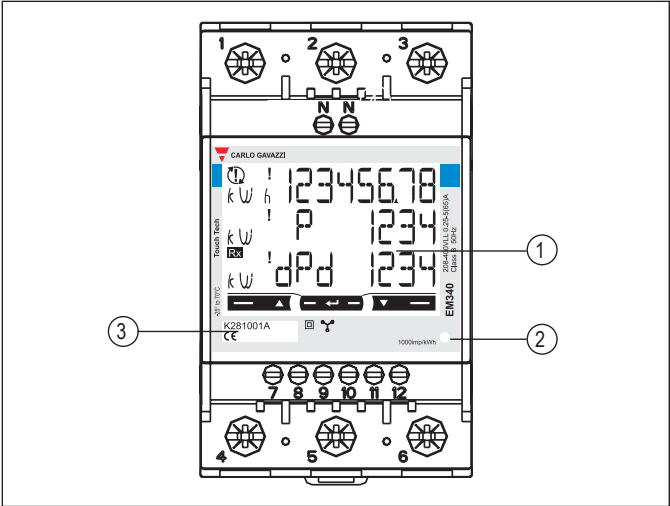

- 1. **Display**  
Backlit LCD display with touch key-pad.
- 2. **LED**  
LED proportional to kWh reading
- 3. **Serial number**  
Area reserved to serial number and MID-relevant data in PF versions

# Dimensions

